


ATyS r

Remotely operated Transfer Switching Equipment from 125 to 3200 A

Transfer switches

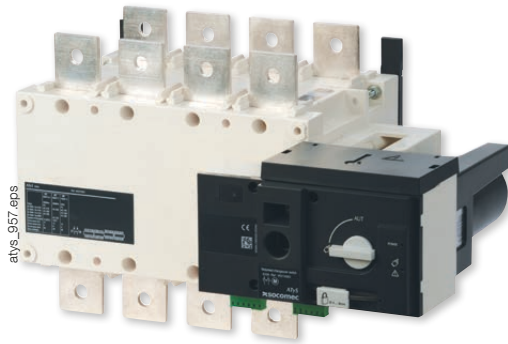

Function

ATyS r are 3 or 4 pole remotely operated motorised transfer switches with positive break indication.

They enable the on-load transfer of two three-phase power supplies via remote volt-free contacts, from either an external automatic controller, using pulse logic, or a switch.

They are intended for use in low voltage power systems where interruption of the load supply is acceptable during transfer.

Advantages

Watchdog relay to check product availability

ATyS r products are equipped with a Watchdog relay which constantly monitors your product, thereby securing the installation. This relay informs in real time the user of the product's availability, i.e. whether it is operational and ready for source switching.

Integrated auxiliary contacts

As part of the product monitoring function, the ATyS r enable the transmission of information relating to their position. This is possible thanks to the standard integration of an auxiliary contact for each position.

Extended power supply range

ATyS r products offer greater availability thanks to their extensive power supply range of 208 to 277 VAC ± 20%.

Even more robust

The updated design includes metal mounting legs across the entire ATyS range, improving the overall robustness of the switches. It also allows an easier and trouble-free mounting of the switches on a back plate with pre-assembled screws.

The solution for

- > Applications with an external ATS/AMF controller
- > Building Management Systems (BMS)



Strong points

- > Watchdog relay to check product availability
- > Integrated auxiliary contacts
- > Extended power supply range
- > Robust design

Conformity to standards

- > IEC 60947-6-1
- > IEC 60947-3
- > GB/T 14048.11



Approvals and certifications⁽¹⁾



BUREAU
VERITAS



(1) Product references on request.

External automatic controller

- > The ATyS r are compatible with our ATyS C25 external controllers (for mains/mains and mains/genset applications) with integrated dual power supply offering power redundancy to the controller and the motor unit. ATyS r are also compatible with ATyS C55 and ATyS C65 controllers offering more features and functionality.

Enclosed RTSE



See "Enclosed transfer switches".

References

ATyS r

Rating (A) / Frame size	No. of poles	ATyS r	Bridging bars	Terminal shrouds	Terminal screens	Auxiliary contact	3 position padlocking	Auto transformer
125 A / B3	3 P	9523 3012						
	4 P	9523 4012						
160 A / B3	3 P	9523 3016	3 P 4109 3019 4 P 4109 4019	3 P 2694 3014 ⁽²⁾ 4 P 2694 4014 ⁽²⁾	3 P 1509 3012 4 P 1509 4012			
	4 P	9523 4016						
200 A / B3	3 P	9523 3020						
	4 P	9523 4020						
250 A / B4	3 P	9523 3025	4109 3025			1599 0502	9599 0003 ⁽³⁾	
	4 P	9523 4025	4109 4025					
315 A / B4	3 P	9523 3031	3 P 4109 3039 4 P 4109 4039	3 P 2694 3021 ⁽²⁾ 4 P 2694 4021 ⁽²⁾	3 P 1509 3025 4 P 1509 4025			
	4 P	9523 4031						
400 A / B4	3 P	9523 3040						
	4 P	9523 4040						
500 A / B5	3 P	9523 3050	4109 3050	3 P 2694 3051 ⁽²⁾ 4 P 2694 4051 ⁽²⁾	3 P 1509 3063 4 P 1509 4063			400/230 VAC 1599 4064
	4 P	9523 4050	4109 4050					
630 A / B5	3 P	9523 3063	4109 3063					
	4 P	9523 4063	4109 4063					
800 A / B6	3 P	9523 3080	3 P 4109 3080 4 P 4109 4080		3 P 1509 3080 4 P 1509 4080	1599 0532		
	4 P	9523 4080						
1000 A / B6	3 P	9523 3100						
	4 P	9523 4100						
1250 A / B6	3 P	9523 3120	4109 3120					
	4 P	9523 4120	4109 4120					
1600 A / B7	3 P	9523 3160	4109 3160		3 P 1509 3160 4 P 1509 4160		9599 0004 ⁽³⁾	
	4 P	9523 4160	4109 4160					
2000 A / B8	3 P	9523 3200						
	4 P	9523 4200						
2500 A / B8	3 P	9523 3250	(1)		3 P 1509 3200 4 P 1509 4200	included		
	4 P	9523 4250						
3200 A / B8	3 P	9523 3320						
	4 P	9523 4320						

(1) See "Copper bar connection pieces".

(2) To fully shroud front, rear, top and bottom 4 references required.

To shroud front switch top and bottom 2 references required (Whenever a bridging beam is fitted, it is then only possible to fit 3 times the reference for the terminal cover).

(3) Factory mounting only.